
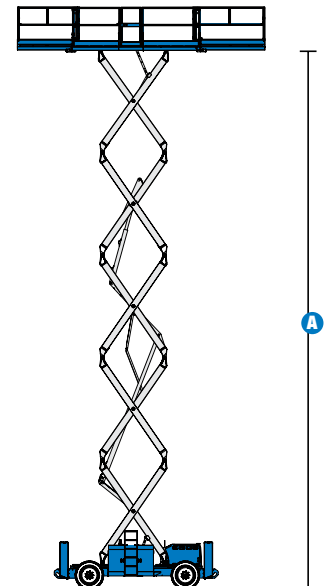



Specifications

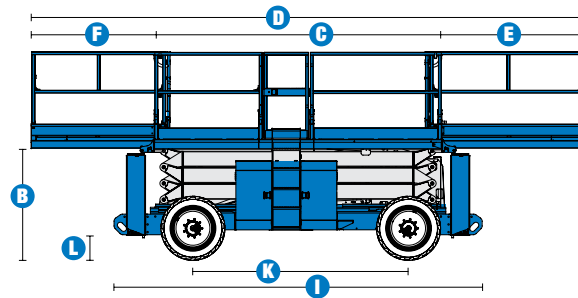

| MODELS | GS™-4390 RT | | GS™-5390 RT | |
|---|-------------|---------------|-------------|---------------|
| | Metric | US | Metric | US |
| Working height maximum* | 15.11 m | 49 ft | 18.15 m | 59 ft |
| A Platform height maximum | 13.11 m | 43 ft | 16.15 m | 53 ft |
| B Platform height - stowed** | 1.80 m | 5 ft 11 in | 2.02 m | 6 ft 7.5 in |
| C Platform length: | 3.98 m | 13 ft 0.5 in | 3.98 m | 13 ft 0.5 in |
| D outside, extended - single deck | 5.34 m | 17 ft 6.25 in | 5.34 m | 17 ft 6.25 in |
| D outside, extended - dual deck | 6.57 m | 21 ft 6.5 in | 6.57 m | 21 ft 6.5 in |
| E Slide-out platform extension deck - front | 1.52 m | 5 ft | 1.52 m | 5 ft |
| F Slide-out platform extension deck - rear | 1.22 m | 4 ft | 1.22 m | 4 ft |
| G Platform width - outside | 1.83 m | 6 ft | 1.83 m | 6 ft |
| H Height: stowed | 2.93 m | 9 ft 7.5 in | 3.15 m | 10 ft 4 in |
| stowed - rails lowered | 2.25 m | 7 ft 4.75 in | 2.47 m | 8 ft 1.25 in |
| I Length - stowed with outriggers | 4.88 m | 16 ft | 4.88 m | 16 ft |
| Length - extended: single deck | 5.40 m | 17 ft 8.5 in | 5.40 m | 17 ft 8.5 in |
| dual deck | 6.57 m | 21 ft 6.5 in | 6.57 m | 21 ft 6.5 in |
| J Width: standard tyres | 2.29 m | 7 ft 6 in | 2.29 m | 7 ft 6 in |
| high flotation tyres | 2.57 m | 8 ft 5 in | 2.57 m | 8 ft 5 in |
| K Wheelbase | 2.84 m | 9 ft 4 in | 2.84 m | 9 ft 4 in |
| L Ground clearance - centre | 0.36 m | 1 ft 2 in | 0.36 m | 1 ft 2 in |

| PRODUCTIVITY | | | | |
|---|---------------|-------------|--------------|-------------|
| Maximum platform occupancy*** | 7 | 7 | 4 | 4 |
| Lift capacity | 680 kg | 1,500 lbs | 680 kg | 1,500 lbs |
| Lift capacity - extension deck | 227 kg | 500 lbs | 227 kg | 500 lbs |
| Drive height | full height | full height | 9.14 m | 30 ft |
| Drive speed - stowed | 8.0 km/h | 5.0 mph | 8.0 km/h | 5.0 mph |
| Drive speed - raised | 1.1 km/h | 0.7 mph | 1.1 km/h | 0.7 mph |
| Gradeability - stowed**** | 50% | 50% | 40% | 40% |
| Maximum outrigger leveling: | front to back | 7° | 7° | 7° |
| side to side | 12° | 12° | 12° | 12° |
| Turning radius - inside | 2.16 m | 7 ft 1 in | 2.16 m | 7 ft 1 in |
| Turning radius - outside | 5.33 m | 17 ft 6 in | 5.33 m | 17 ft 6 in |
| Controls | proportional | | proportional | |
| Drive | four wheel | | four wheel | |
| Raise / lower speed | 55 / 49 sec | 55 / 49 sec | 55 / 49 sec | 55 / 49 sec |
| Tyres - non-marking foam-filled rough terrain | 30 x 84 cm | 12 x 33 in | 30 x 84 cm | 12 x 33 in |

| POWER | | | | |
|---------------------------|---|--------|--------|--------|
| Power source | Deutz D2011L03i 3 cylinder diesel 36 kW (49 hp), air cooled | | | |
| Auxiliary Power unit | 12V DC | | 12V DC | |
| Fuel tank capacity | 113.6L | 30 gal | 113.6L | 30 gal |
| Hydraulic system capacity | 113.6L | 30 gal | 113.6L | 30 gal |

| WEIGHT***** | | | | |
|-----------------|----------|------------|----------|------------|
| with outriggers | 7,692 kg | 16,958 lbs | 8,274 kg | 18,241 lbs |

| STANDARDS COMPLIANCE | ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10 |
|----------------------|---|
|----------------------|---|

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** Based on RT tyres. Deduct 2 in (5.8 cm) for high flotation air-filled and non-marking tyres.
 *** GS™-5390 CE/AUS market limited to 4 person platform occupancy.
 **** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.
 ***** Weight will vary depending on options and/or country standards.

Features

STANDARD FEATURES

MEASUREMENTS

GS™-4390

- 15.11 m (49 ft) working height
- Up to 680 kg (1,500 lbs) lift capacity

GS™-5390

- 18.15 m (59 ft) working height
- Up to 680 kg (1,500 lbs) lift capacity

PRODUCTIVITY

- 3.98 m x 1.83 m (13 ft 0.5 in x 6 ft) steel frame platform with replaceable diamond plate aluminium deck
- Dual slide-out platform extension decks 1.52 m (5 ft) front and 1.22 m (4 ft) rear
- Proportional lift and drive
- Onboard diagnostic system
- Two self-closing gates
- 4WD
- Automatic leveling hydraulic outriggers
- Oscillating axle
- Positive traction control
- Four-wheel braking
- Slide-out engine tray
- Hydraulic oil cooler
- Tilt alarm
- Descent alarm
- Horn
- Hour meter
- Non-marking foam-filled rough terrain tyres
- Dual flashing beacons
- Motion alarm

POWER

- 12V DC auxiliary power
- Deutz diesel 36 kW (49 hp)


OPTIONS & ACCESSORIES

PRODUCTIVITY

- Air line to platform
- Pipe cradle (pair)
- High flotation foam-filled tyres 41 x 84 cm (16 x 33 in)
- Foam-filled rough terrain tyres
- Platform work lights

POWER OPTIONS

- 7 kVA Hydraulic generator (240 V/50 Hz)
- Cold weather package
- Arctic package
- Diesel scrubber/spark arrestor
- Diesel spark arrestor (without scrubber)
- 240 V power to platform

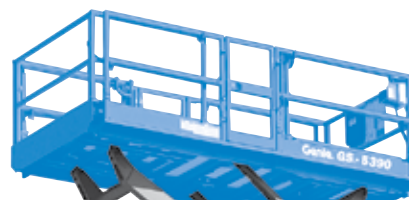

1 3 0 0 6 2 7 4 7 4

Genie Australia – Toll free number 1800 788 633

Brisbane (Head Office)
33 Kimberley Street
Darra QLD 4076

Sydney
74 Glendenning Road
Glendenning NSW 2761

Melbourne
374 Hammond Road
Dandenong VIC 3175

Perth
126 Sheffield Road
Welshpool WA 6106

Genie United States Distributed by:

18340 NE 76th Street
P.O. Box 97030
Redmond, Washington
98073-9730

Effective Date: April 2012. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operators' Manual for instructions on the proper use of this equipment. Failure to follow the Operators Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks, or trade names of Terex Corporation, Terex South Dakota, Inc., and/or their subsidiaries in the USA and other countries. All rights reserved. Terex is a registered trademark of Terex Corporation in the USA and many other countries. Genie is a registered trademark of Terex South Dakota, Inc. in the USA and many other countries. ©2009 Terex Corporation.